


The advertisement features a vibrant green background. On the right side, a large, detailed image of a silver-colored metal drill bit is shown, with its flutes clearly visible. To the left of the drill bit, there are three white line-art drawings of different drill bit designs, including a double-flute design at the top, a more complex multi-flute design in the middle, and a standard double-flute design at the bottom. The text 'A-PRO' is prominently displayed in a large, bold, white sans-serif font, with 'SERIES' in a smaller, all-caps, white sans-serif font directly below it.

A-PRO
SERIES

2날 롱샹크 코너 라디우스 엔드밀

2 FLUTES LONG SHANK CORNER RADIUS END MILLS

- ◆ HRC50이하 소재의 가공용으로 설계
- ◆ 날부파손 방지 및 절삭성 증대를 위한 형상설계
- ◆ 직경대비 3~4배 큰 형상가공
- ◆ Designed for cutting of hardened steels below HRC50.
- ◆ Geometry design to protect the breakage of cutting edge and improve the cutting performance.
- ◆ Machining up to the dimension three times as large as the diameter.

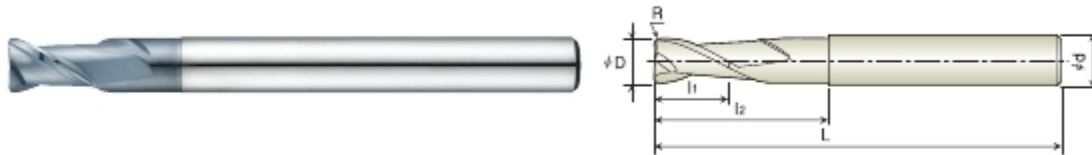

unit (mm)

신규 모델번호 Model No.	구 모델번호 Model No.	인선 직경 Outside Diameter D	코너 반경 Corner Radius CR	유효장 Effective Length l ₂	날 장 Length of cut l ₁	샹크경 Shank Diameter d	전 장 Overall Length L
2ALR 060 R05 180 680	APLS2060R05	6	R0.5	18	9	6	80
2ALR 060 R10 180 680	APLS2060R10	6	R1.0	18	9	6	80
2ALR 080 R05 240 890	APLS2080R05	8	R0.5	24	12	8	90
2ALR 080 R10 240 890	APLS2080R10	8	R1.0	24	12	8	90
2ALR 100 R05 300 AA0	APLS2100R05	10	R0.5	30	15	10	100
2ALR 100 R10 300 AA0	APLS2100R10	10	R1.0	30	15	10	100
2ALR 120 R05 300 CB0	APLS2120R05	12	R0.5	30	18	12	110
2ALR 120 R10 300 CB0	APLS2120R10	12	R1.0	30	18	12	110

SMG	TIAIN
2	CR ± 0.01
35°	HRC ~50
h6	DATA p.195

A-PRO

샹크경, 전장 표시법	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
		10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
사이즈	인선직경공차(mm)																				
D Size	D Tolerance																				
All	0~0.020																				

● : NEW